

3.1101.616559.0000000

原材料 机乐堂 JR-CL25 3.4A三合一 Lightning 弹簧线车充 说明书 V1.0

尺寸：60x90mm

材质：128g铜版纸+正反单色印刷+对折

### Cautions


1. Please charge your device after the car engine starts.
2. Please keep the power within 17W to prevent device damage caused by excessive power.
3. Do not use it in wet environment or thunderstorm weather.
4. Do not clean the device with strong chemicals, cleaning agents, etc.
5. Do not drop or throw it violently and please keep it from collision considering this product is an electronic product.

### Warm Reminder:

Improper use may damage the product or endanger personal and property safety.  
All the personal and property damage caused by improper use (i.e. customers violating the User Manual) will not be borne by our company.



### JOYROOM

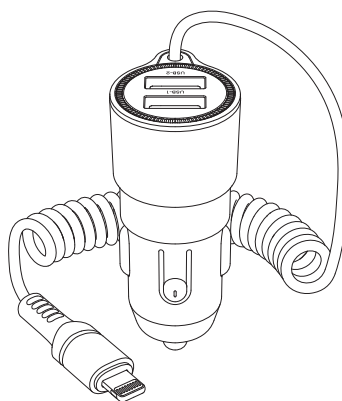

### User Manual

3.4A 3-in-1 Car Charger with Coiled Lightning Cable

4

1


### Parameters

Name	3.4A 3-in-1 Car Charger with Coiled Lightning Cable
Model	JR-CL25
Input	12V~24V
USB 1 output	5V $\approx$ 3A
USB 2 output	5V $\approx$ 3A
Lightning cable output	5V $\approx$ 2.4A
USB+Lightning cable/ USB 1+USB 2 output	5V $\approx$ 3.4A
USB 1+USB 2+Lightning cable output	5V $\approx$ 3.4A
Total output	5V $\approx$ 3.4A (Max)
Material	PC+ABS fireproof material
Size	65*31*26mm
Net weight	46g

### Packing list

Car charger \*1  
User Manual \*1  
Warranty Card \*1

### Product function diagram

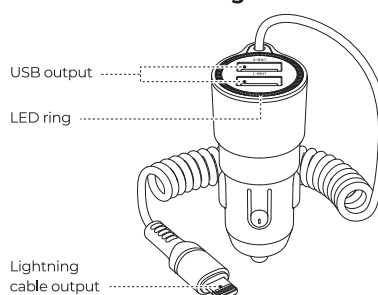

### Product introduction

The product is a 3-in-1 car charger with coiled Lightning cable. With 3.4A high current output, it can charge 3 devices simultaneously. The coiled cable can be extended up to 1.5m, which is very convenient for use without tangles. The colorful LED ring lets you find the charging ports easily at night. The anti-skid clips ensure stable connection against bumps. With intelligent recognition chip and proper current distribution, the car charger is harmless to both your phones and cars. The product adopts fireproof PC material, which generates less heat during charging, thus safety is guaranteed.

2

3